

CABLE PRODUCTS

WIRE

SPIRO PRO 8mm

TAYLOR

SPIRO PRO 8mm WIRE

8mm WIF

PRO

IRO

FEATURED PRODUCTS

The top choice of racers and enthusiasts for value and high-performance.

For over 90 years, Taylor Cable Products have represented quality and customer satisfaction in the automotive and performance racing markets.

We are proud to have our Ignition Wire Sets firing some of the fastest race and street vehicles in the world. 8mm Spiro Pro, 8.2mm ThunderVolt, 8mm High Energy, 8mm StreeThunder, and 10.4mm 409 Series Ignition Wire Sets are a testimony to our commitment to innovation and development of highly functional ignition products.

What is the difference between Universal, Race Fit, and Custom Wire Sets?

Universal Wires Sets

- Extra-long wire sets with only one spark plug terminal and boots attached.
- End User cuts each wire to length and attaches distributor/coil terminal and boot
- All sets come with both HEI and Socket Style boots and terminals in the kit
- Other types of distributor/coil boot and terminal kits are available

Race Fit

- Each wire is cut to the exact length, ready to install, with boots and terminals on each end
- Lengths may not be correct if using fixed looms or running wires in an alternate path
- Extra-long coil wire is included, one end complete, the other end ready to cut and install the correct boot and terminal on your choice of high-performance coil

Custom

• Custom Wires are designed to replicate your OE wire set. Each wire is cut to length and booted to match OE wires. Lower resistance will get more fire to your spark plugs, increased horsepower and torque, and improved fuel mileage.

How to shop Custom Ignition Wire Sets

- Choose the Ignition Wire Series that is best suited to your needs
 - 8mm Spiro Pro
 - 10.4mm Pro Race
 - 8.2mm ThunderVolt
 - 8mm StreeThunder
 - 8mm High Energy Ignition


Visit **pertronixbrands.com** and use *"Find Your Perfect Part"* to Search By Vehicle and enter Year, Make, Model, and Engine information to find your Ignition Wire application.





PERTRONIX PERFORMANCE BRANDS EMISSIONS CODES This Product is considered a Replacement Part per CARB and EPA regulations for emissions compliance and is legal for sale and use on specified vehicles in all 50 states as stated in Manufacturer's Application Guide and Installation Instructions.



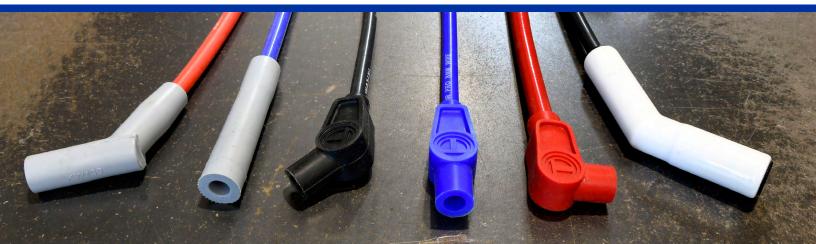



8mm Spiro Pro wires are engineered to deliver superior performance with unsurpassed quality.

> They are the top choice amongst racers and enthusiasts alike with heat protection up to 600° F and 65,000 volts of dielectric strength.

For Street & Strip, Off Road, Street Rod, and Custom Cars

- 8.0 mm Outer Silicone Jacket - Rated up to 65K Volts - Heat resistant to 600 Degrees
- Silicone inner core provides added heat protection and superior flexibility throughout its lifetime
- 350 ohms per foot
- Highly conductive stainless steel spiral wound core
- Superior RFI / EMI suppression for applications with CD or electronic ignitions, on board computers, stereos or pit radios
- Taylor low profile Silicone Pro Boots
- Double spring lock spark plug terminals
- Available in Black Red and Blue
- Universal Fit sets and will require cutting to fit, terminating, and booting the distributor end
- Available in Universal, Race Fit and Custom applications

8mm Spiro Pro wire sets offer superior heat protection across a broad range of applications for street and track.



Fiberglass Braid for Pull Strength

SPIRO PRO 8mm WIRE TAYLOR PRO

Universal Wire Set Lengths

4 cyl - 48, 36, 36, 36, coil 30

6 cyl - 46, 44, 42, 30, 28, 28, coil 36 8 cyl - 553, 53, 49, 49, 38, 38, 33, 33, coil 36 Street Hemi - 61, 56, 5, 47, 35, 30, 29, 29, coil 36

| Wire Config | Cyl | Black | Red | Blue |
|-----------------|-----|-------|-------|-------|
| 180° Plug Boots | 4 | 73035 | 73235 | 73635 |
| 90° Plug Boots | 6 | 73047 | 73247 | 73647 |
| 180° Plug Boots | 6 | 73045 | 73245 | 73645 |
| 90° Plug Boots | 8 | 73051 | 73251 | 73651 |
| 135° Plug Boots | 8 | 73053 | 73253 | 73653 |
| 180° Plug Boots | 8 | 73055 | 73255 | 73655 |

Inner Core

TAYLOR CABLE PRODUCTS

PIRO PRO 8mm WIRE

01

20 9

WIRI

8mm

0

S

٩

RO

SPI

2 0 XL ₹

LS UNIVERSAL IGNITION WIRES

- Perfect for coil relocation and custom header applications
- 36" Wires and multiple spark plug boot choices allow the perfect fit
- Spark Plug end is assembled
- Universal Fit sets and will require cutting to fit, terminating, and booting the distributor end

SPIRO PRO 8mm WIRE

YLOR SPIRO PRO 8mm WIRE

R SPIRO PRO 8mm WIRE



TAYLOR

| Wire Type | Wire Config | Black | Red |
|--------------------|-----------------|-------|-----|
| 8mm Spiro Pro | 90° Plug Boots | | |
| 8mm Spiro Pro | 135° Plug Boots | | |
| 8mm Spiro Pro | 180° Plug Boots | | |
| 409 Pro Race | 135° Plug Boots | | |
| 8.2mm Thunder Volt | 90° Plug Boots | | |
| 8.2mm ThunderVolt | 180° Plug Boots | | |

8.0mm TCW CORE PRO UNIVERSAL IGNITION WIRES

• 8.00mm Outer Silicone Jacket

- O ohms per foot resistance tin plated copper wire core (solid core)
- Heat resistant up to 600°
- Silicone inner core provides added heat protection and superior flexibility throughout its lifetime
- Recommended for Vertex® Magneto or point type ignition
- Not recommended for applications with onboard electronics or electronic ignition
- Universal fit sets will require cutting to fit, terminating, and booting the distributor end

| Wire Config | Cyl | Black | Red | BLUE |
|---------------------|-----|-------|-----|------|
| 90° Plug Boots | 8 | | | |
| 135° Plug Boots | 8 | | | |
| 180° Plug Boots | 8 | | | |
| 331-426 Street Hemi | 8 | | | |
| 90° Magneto | 8 | | | |
| 180° Magneto | 8 | | | |

Universal Wire Set Lengths

4 cyl - 48, 36, 36, 36, coil 30 6 cyl - 46, 44, 42, 30, 28, 28 coil 36 8 cyl - 53, 53, 49, 49, 38, 38, 33, 33, coil 36 Street Hemi - 61, 56, 51, 47, 35, 30, 29, 29, coil 36 Magneto - 53, 53, 53, 53, 53, 53, 53, 53, coil 18

8mm SPIRO PRO CERAMIC BOOT

- 8.0mm Ceramic Boots
- 350 ohms per foot
- Provide superior heat protection up to 2000 degrees
- Highly conductive stainless steel spiral wound core
- Superior RFI / EMI suppression for applications with CD or electronic ignitions, on board computers, stereos, or pit radios
- Universal fit sets will require cutting to fit, terminating, and booting the distributor end
- For RVs, Tow Vehicles and High Heat Applications



8 cyl - 53,53,49,49,38,38,33,33, coil 36

| Vire Config | Application | Black | Red |
|----------------|-------------|-------|-----|
| | Application | DIACK | neu |
| 90° Plug Boots | Universal | | |
| 35° Plug Boots | Universal | | |
| 80° Plug Boots | Race Fit | | |
| 35° Plug Boots | Race Fit | | |
| 90° Plug Boots | Race Fit | | |
| 80° Plug Boots | Custom | | |
| 35° Plug Boots | Custom | | |
| | | | |

8.0mm RESISTOR CORE PRO UNIVERSAL IGNITION WIRES

- 8.00mm Outer Silicone Jacket
- Heat resistant up to 600°
- 3500 ohms per foot resistor core
- Silicone inner core provides added heat protection and superior flexibility throughout its lifetime
- Eliminate RFI/EMI which can interfere with onboard electronics and stereos
- Not Recommended for CD ignitions
- Universal fit sets will require cutting to fit, terminating, and booting the distributor end

| Wire Config | Cyl | Black | Red | Blue |
|-----------------|-----|-------|-----|------|
| 180° Plug Boots | 6 | | | |
| 90° Plug Boots | 8 | | | |
| 135° Plug Boots | 8 | | | |
| 180° Plug Boots | 8 | | | |

Universal Wire Set Lengths

4 cyl - 48, 36, 36, 36, coil 30 6 cyl - 46, 44, 42, 30, 28, 28, coil 36 8 cyl - 53, 53, 49, 49, 38, 38, 33, 33, coil 36



Firing the Finest Rides in America since 1923!

TAYLOR

SPIRO

8mm

LOR

SPIRO

PRO

amm

IRO

PRO 8mm

WIRE



8mm High Energy wires are the perfect choice for the daily driver and meet the demands of today's high-tech ignitions and high under hood temperatures.

Taylor sets the standard in "High Energy" performance wire, available with a Resistor Core or Solid Core wire. The popular "Resistor Core" has less resistance than most OE wire conductors with little RFI interference while Solid Core is for racing applications where RFI is not a concern.

The perfect choice for the daily driver. OE Replacement

- 8.0 mm Outer Silicone Blend Jacket
 - Heat resistant to 600 Degrees
- Silicone inner core provides added heat
 protection throughout its lifetime
- 5000 ohms per foot resistor core
- Eliminates RFI /EMI which can interfere with onboard electronics and stereos
- Not recommended for CD ignitions
- High Temp Silicone Boots
- Double spring lock spark plug terminals
- Available in Blue
- Universal Fit sets and will require cutting to fit, terminating, and booting the distributor end
- Available in Universal, Race Fit and Custom applications

8mm High Energy wires are engineered to deliver superior performance with unsurpassed quality.

Clamp Style Separators



Black: 42700 Red: 42720 Blue: 42760

HI-ENERGY 8mm WIRE

Universal Wire Set Lengths

8 cyl - 53,53,49,49,38,38,33,33, coil 36

| Wire Config | CYL | Blue |
|-----------------|-----|-------|
| 180° Plug Boots | 6 | 60645 |
| 90° Plug Boots | 8 | 60651 |
| 135° Plug Boots | 8 | 60653 |
| 180° Plug Boots | 8 | 60655 |



YLOR HI-ENERGY BIT

T

R

0

00

YL

80

HI-ENERG)

2

TAY



8mm StreeThunder wires feature a 500 ohm per foot resistance conductor wrapped in durable silicone blend double layer jacketing for heat protection, strength, and longevity.

mm WIRE

STREETHUND

Ľ

AYLO

STREETHUNDER

Ľ

0

AYL

They are the top choice amongst racers and enthusiasts alike with heat protection up to 600° F and 65,000 volts of dielectric strength.

For Street & Muscle Cars

- 8.0 mm Outer Silicone Jacket
 - Heat resistant to 600 Degrees
- Silicone inner core provides added heat protection throughout its lifetime
- 500 ohms per foot
- Highly conductive stainless steel spiral wound core
- Eliminates RFI /EMI which can interfere with onboard electronics and stereos
- Silicone boots protect against high exhaust temperatures
- Double spring lock spark plug terminals
- Available in Black
- Universal Fit sets and will require cutting to fit, terminating, and booting the distributor end
- Available in Universal, Race Fit and Custom applications

8mm StreeThunder wires are designed to deliver great performance at an extremely affordable price.





8.2mm ThunderVolt[®] wires outperform the competition in looks and performance at an affordable price.

For Street & Strip, Off Road, Street Rod, and Custom Cars

- 8.2 mm Outer Silicone Jacket
 - Heat resistant to 600 Degrees
- Silicone inner core provides added heat protection and superior flexibility throughout its lifetime
- 40 ohms per foot
- Highly conductive stainless steel spiral wound core
- RFI / EMI suppression for applications with CD or electronic ignitions, on board computers, stereos, or pit radios
- Silicone boots protect against high exhaust temps
- Double spring lock spark plug terminals
- Available in Black, Red and Blue
- Universal Fit sets and will require cutting to fit, terminating, and booting the distributor end

E 6

Available in Universal, Race Fit and Custom applications

8.2mm ThunderVolt® wires outperform the competition in looks and performance at an affordable price.

Get the right tools for the job!

PERTRONIX Spark Plug Wire

Spark Plug Wire Stripping Tool # T3004

> Quick Change 6 Piece Ratchet Crimp Tool Kit # T3001

OR THUNDERVOLT 8.2mm WIRE

8.2mm WIRE

HUN

L 0 R

A

8.2mm WIRE

THUNDERVOLT

Y L O

AL

NDERVOLT 8.2mm WIRE

æ

LAYLO

| Wire Config | Cyl | Black | Red | Blue |
|-----------------|-----|-------|-------|------|
| 180° Plug Boots | 6 | 83045 | 83245 | 8364 |
| 90° Plug Boots | 8 | 83051 | 83251 | 8365 |
| 135° Plug Boots | 8 | 83053 | 83253 | 8365 |
| 180° Plug Boots | 8 | 83055 | 83255 | 8365 |

TAYLOR. CABLE PRODUCTS



10.4mm 409 Series Ignition Wires provide continuous heat protection up to 600° F and 102,000 volts of dielectric strength.

SPIRO PRO 10.4mm WIRE

409

4

ш

WIRI

.4mm

10

RO

SP

409

2

0

4

-

60

4

œ.

0

PIRO

10.4mm 409 Series Ignition Wires provide continuous heat protection up to 600° F and 102,000 volts of dielectric strength. Each wire is constructed with a conductor, silicone core, and fiberglass wrapped in a silicone jacket.

> Color coordinated silicone Pro Boots feature vibration proof double spring lock spark plug terminals.

For Drag Race, Circle Track, Off Road or High Heat Applications

- 10.4 mm Outer Silicone Jacket
- Rated up to 65K Volts
- Heat resistant to 600 Degrees
- Silicone inner core provides added heat protection and superior flexibility throughout its lifetime
- 350 ohms per foot
- Highly conductive helically wound core
- Superior RFI / EMI suppression for applications with CD or electronic ignitions, on board computers, stereos, or pit radios
- Taylor low profile Silicone Pro Boots
- Double spring lock spark plug terminals
- Available in Black, Red and Blue
- Universal Fit sets and will require cutting to fit, terminating, and booting the distributor end
- Available in Universal, Race Fit and Custom applications





Firing the Finest Rides in America since 1923!

8

180° Plug Boots

PERFORMANCE GH MOTORCYCLE IGNITION WIRE SET

| Wire Type | Wire Config | Black | Red |
|-------------------|-----------------|-------|-------|
| 8mm Spiro Pro | 90° Plug Boots | 73061 | - |
| 8mm Spiro Pro | 135° Plug Boots | 73063 | - |
| 8mm Spiro Pro | 180° Plug Boots | 73065 | - |
| 409 Pro Race | 135° Plug Boots | 79052 | 79252 |
| 8.2mm ThunderVolt | 90° Plug Boots | 83061 | - |
| 8.2mm ThunderVolt | 180° Plug Boots | 83065 | - |

8mm SPIRO PRO UNIVERSAL MOTORCYCLE WIRES

- 8.0mm Outer Silicone Jacket
- Rated up to 65K volts
- Heat resistant to 600°
- Silicone inner core provides added heat protection and superior flexibility throughout its lifetime
- 350 ohms per foot
- Highly conductive stainless steel spiral wound core
- Taylor signature low profile Silicone Pro **Boots**
- Double spring lock spark plug terminals
- Available in Black, Red, and Blue

| Wire Length | Wire Config | Black | Red | Blue | Resistor | TCW Black |
|----------------|-----------------|-------|-----|------|----------|--------------|
| 24 | 90° Plug Boots | 10051 | | | | |
| 24 | 135° Plug Boots | | | | | |
| 24 | 180° Plug Boots | | | | | |
| 36 | 180° Pro Comp | | | | | |

| Year & Model | SERIES | Models | Boots | Wire Lengths | Black | Red | Blue |
|-------------------------|---------------|--|-------|-----------------|-------|-----|------|
| TOURING | | | | | | | |
| 09-16 FL | Twin Cam | Road King, Electra Glide, Road Glide, Street Glide | 135° | 35″ / 17″ | 10036 | | |
| 99-08 FL | Twin Cam F.I. | Road King, Electra Glide, Street Glide F.I. | 180° | 21″/21″ | 10034 | | |
| 99-06 FL | Twin Cam Carb | Road King, Electra Glide, Street Glide Carb | 180° | 21.5″/9″ | 10033 | | |
| 80-98 FLH | Evo | Electra, Road King, Street Glide | 180° | 21.5″/9″ | 10032 | | |
| 65-79 FL | | Road King, Electra Glide, Road Glide, Street Glide | 90° | 16″ / 7″ | 10030 | | |
| SUPER GLID | E | | | | | | |
| 99-07 FXD | Twin Cam | Dyna | 90° | 19″ / 7″ | 10031 | | |
| 91-98 FXD | Evo | Dyna | 90° | 16″ / 7″ | 10030 | | |
| 82-00 FXR | Evo | Super Glide | 90° | 12″ / 12″ | 10035 | | |
| 65-85 FX | | Super Glide, Dyna, FXR | 90° | 16" / 7" | 10030 | | |
| SOFTAIL | | | | | | | |
| 08-17 FXC | Twin Cam | Softail Rocker or center mount Twin Cam Coils | 135° | 8″ / 8″ | 10038 | | |
| 00-11 FL/FX | Twin Cam | Softail (except Rocker) | 90° | 19″ / 7″ | 10031 | | |
| 89-99 FL/FX | Evo | Softail | 90° | 16" / 7" | 10030 | | |
| SPORTSTER | | | | | | | |
| 07-18 XL | Evo | Sportster | 180° | 21.5″/9″ | 10033 | | |
| 04-06 XL | Evo | Sportster (except XL1200S Model w/4 wires | 180° | 21″/21″ | 10034 | | |
| 86-03 XL | Evo | Sportster (except XL1200S Model w/4 wire | 180° | 21.5″/9″ | 10032 | | |
| 65-85 XL | Ironhead | Sportster | 90° | 16" / 7" | 10030 | | |
| VICTORY 08-17 | V-Twin | All (except Octane) | 180° | 21″ / 20″ | 10063 | | |



SPIRO PRO 8mm WIRE TAYLOR

SPIRO PRO 8mm WIRE

TAYLOR

PRO 8mm SPIRO 2 AYLO

WIR

BATTERY PRODUCTS

ALUMINUM BATTERY BOXES

100 Series (fits most battery sizes), Optima and Odyssey

OPTIMA BATTERY BILLET ALUMINUM TRAYS

Upgrade the look of your Optima Battery to a full, custom look



BATTERY CABLE KITS

Premium Copper Wire delivering more cranking power

BATTERY CABLE TERMINAL KITS

Tin plated copper compression battery cable terminals designed for fast and easy installation

BATTERY CABLE GROUNDING KITS

Track tested and proven to add horsepower while properly grounding engines



COPPER COPPER MILITION COPPER MILITION COPPER MILITION COPPER MILITION COPPER MILITION COPPER





GROUNDING STRAPS

4-Gauge Tinned Copper Wire



TRUNK MOUNT BATTERY RELOCATION KITS

Kits for multiple applications to provide better weight distribution for imrpoved traction



CABLE PRODUCTS

IGNITION WIRE ACCESSORIES

WIRE

 & TERMINALS
 SEPARATORS
 TOOLS

 Boots and Boot Protectors, Terminals
 Clamps, Loom Kits, Sleeving
 Get The Job Done Like A Professional

PPPPP

...

SPARK PLUG & COIL WIRE REPAIR KITS

SPARK PLUG BOOTS

Easy Replacements For Damaged Wires

BULK SPARK PLUG WIRE

WIRING

30 Foot Coils and 100 Foot Spools










4



IGNITION WIRES & BATTERY PRODUCTS

TAYLOR





909-599-5955

440 E Arrow Hwy • San Dimas, CA 91773

www.pertronixbrands.com